


50t



THE SAFE, COMPACT, SELF-PROPELLED SUBMERSIBLE BOAT HOIST

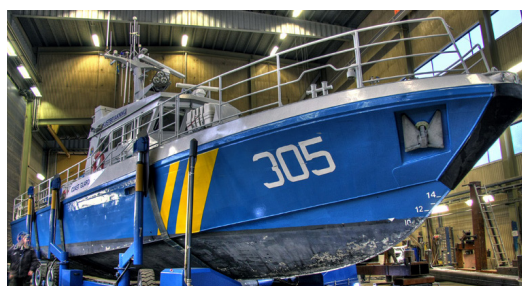


The SUBLIFT 50t is a flexible tool for the marina who want to offer fast service to its customers. It is equipped with slings on three pairs of hydraulic lifting arms making the hoist truly flexible. Boat weights up to 50 ton can be handled.

sublift.se

Sublift 50t

Submersible | Flexible width | Remote controlled | Safe and fast

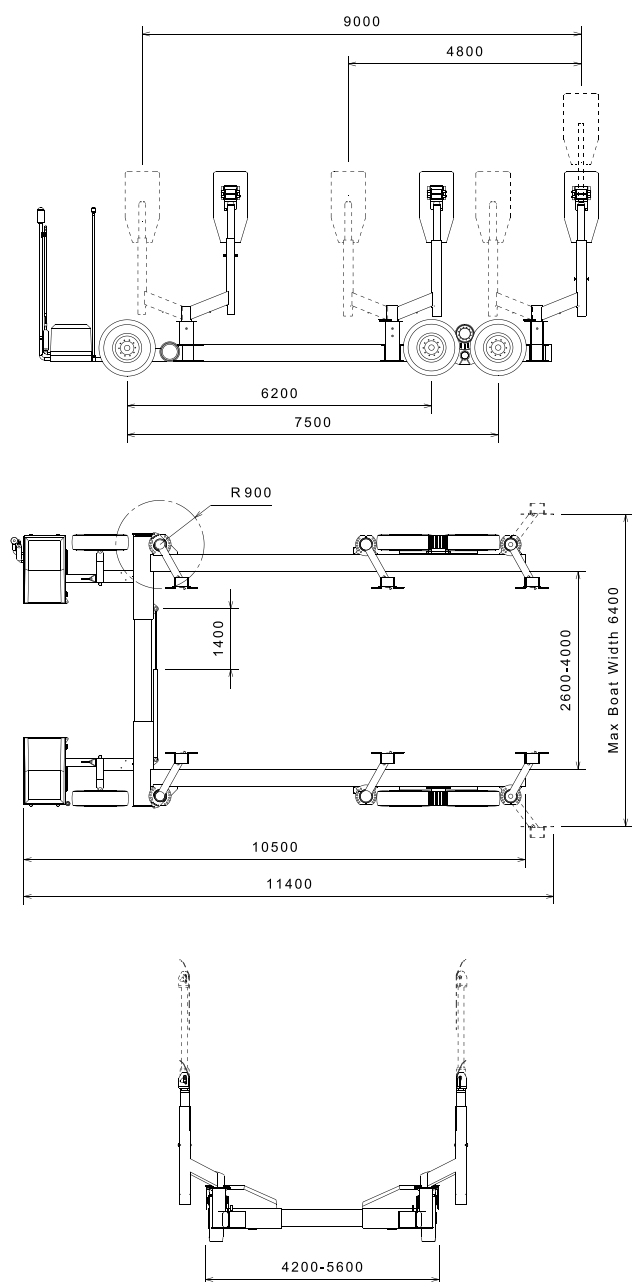

Drawings are subject to change without prior notice

- SUBLIFT 50t is designed for a maximum boat load of 50 ton and maximum width of 6.4 m
- All functions are accessible from the remote control
- Transmission on the aft bogie wheels is fully hydraulic powered
- The speed from slow crawling, in "turtle" mode, up to walking pace, in "hare" mode, is steplessly controlled
- Electric sling locks is standard



SUBLIFT 50t - DATA

Service weight	12 500 kg
Max load	50 000 kg
Max load / sling	16 800 kg
Highest slope	1/10
Max side slope	1/20
Engine	Caterpillar 55 kW
Max speed	unladen approx. 6 km/h



- The lifting height and optionally width are adjustable by hydraulics
- Actual load on each lift strap is displayed in the remote control
- The hoist is protected with hot dip galvanizing, epoxy primer and a polyurethane coating
- Wheel axles and hubs have special seals that prevents water penetration
- Winch and diff lock available as options



Sublift